



安装外形图 Overall dimension

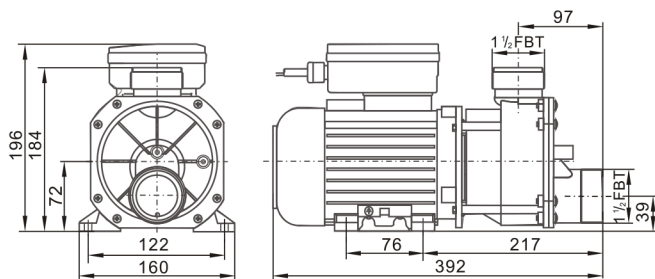

性能曲线 Performance curves

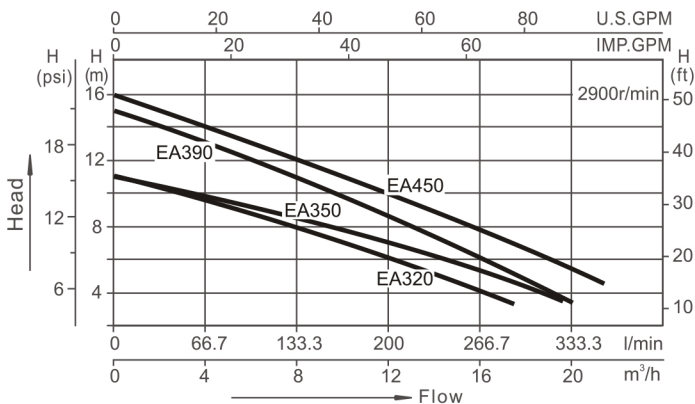

EN 60335-1: 2012+A11
EN 60335-2-41: 2003+A1+A2
EN 60335-2-60: 2003+A1+A2+A11+A12
EN 62233 : 2008
ERP547/2012

SAA

AS/NZS60335.1
AS/NZS60335.2.41



海水养殖循环过滤
Mariculture circulation filter



浴缸水循环
Recirculation of water in Bathtub pump




SPA池水循环
Recirculation of water in SPA equipment

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max.working pressure: 0.3MPa

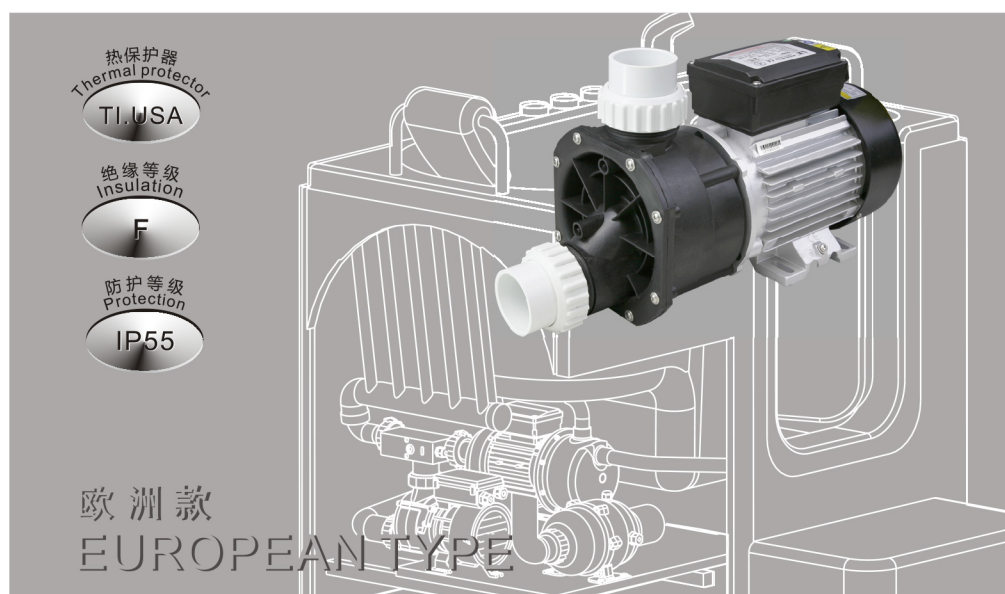

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P ₁) kW HP	电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
EA320	280	11	220-240/50	0.55 0.75	3.2	48.5or50	9.0	420×180×255
EA350	320	11	220-240/50	0.75 1.0	3.8	48.5or50	9.5	420×180×255
EA390	335	15	220-240/50	0.9 1.2	4.6	48.5or50	9.8	420×180×255
EA450	360	16	220-240/50	1.1 1.5	5.8	48.5or50	10.5	420×180×255

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-Ring
4	十字盘头螺钉组合件 cross raised head screw assembling
5	泵盖 Pump Cover
6	O形圈 O-Ring
7	叶轮 Impeller
8	机械密封 Mechanical seal
9	泵壳 Pump Casing
10	螺钉 Screw
11	电机 Motor

