



安装外形图 Overall dimension

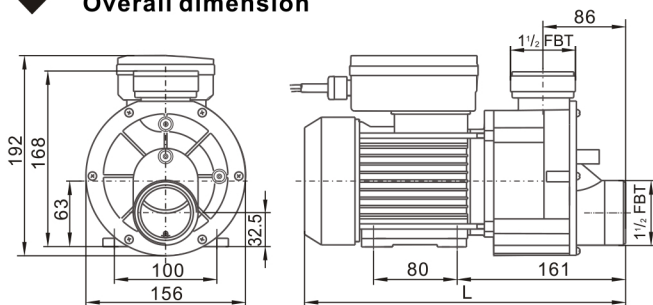

型号 Model	L
WM50	306
WM75	306
WM100	306
WM120	336

性能曲线 Performance curves

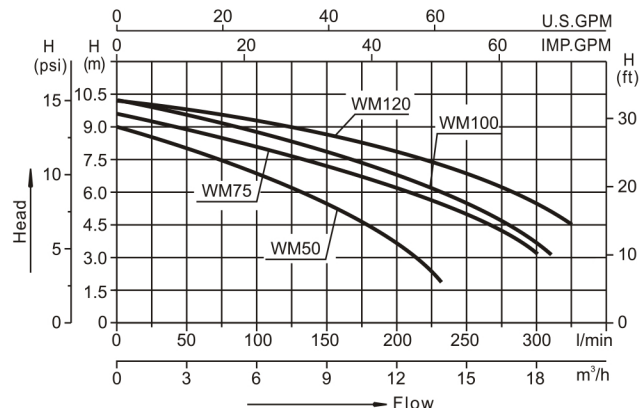

EN 60335-1: 2012+A11
EN 60335-2-41: 2003+A1+A2
EN 60335-2-60: 2003+A1+A2+A11+A12
EN 62233: 2008
EN 60335-2-30: 2009
EN 60335-2-35: 2002+A1+A2
EN 60335-2-80: 2003+A1+A2
ERP547/2012



海水养殖循环过滤
Mariculture circulation filter



浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa



欧洲款
EUROPEAN TYPE

技术参数列表 Technical parameter list

型 号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P ₁)		电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
				kW	HP				
WM50	230	9	220-240/50	0.37	0.5	2.0	48.5or50	6.0	335×175×250
WM75	300	9.5	220-240/50	0.55	0.75	3.0	48.5or50	6.2	335×175×250
WM100	320	10	220-240/50	0.75	1.0	3.5	48.5or50	6.6	335×175×250
WM120	350	10	220-240/50	0.9	1.2	4.0	48.5or50	7.3	365×175×250

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接 头 Tie
3	O形圈 O-Ring
4	十字槽盘头自攻螺钉 Cross recessed pan head tapping screws
5	泵 盖 Pump Cover
6	O形圈 O-Ring
7	叶 轮 Impeller
8	机械密封 Mechanical seal
9	泵 壳 Pump Casing
11	电 机 Motor

